

MARKED SUBSTITUTE SPECIFICATION

DESCRIPTION

BLUE COLOR FILTER, AND ORGANIC ELECTROLUMINESCENT DEVICE

USING THE SAME

5

TECHNICAL FIELD

CROSS REFERENCE TO RELATED APPLICATION

_____The present application incorporates herein by reference the entire disclosure and
10 contents of the corresponding PCT application PCT/JP2003/08279, filed August 15, 2003.
Also incorporated by reference are the entire disclosure and contents of the earlier
corresponding Japanese application JP PA 2002-055275.

TECHNICAL FIELD

15 The invention relates to a blue color filter, and an organic electroluminescent
(hereinafter abbreviated to 'organic EL') device using the same, for use in a display of
mobile terminal equipment, industrial measuring equipment or the like.

BACKGROUND ART

20

As one method of making organic EL displays be multi-color or full-color, a color
conversion method in which fluorescent materials that absorb light in the emission region of
an organic light emitter and then emit fluorescence in the visible region are used in filters has
been disclosed in Japanese Patent Application Laid-open No. 3-152897, Japanese Patent
25 Application Laid-open No. 5-258860, and so on. According to this method, the color of the
light emitted by the organic light emitter is not limited to being white, and hence an organic
MARKED SPECIFICATION

light emitter having a higher brightness can be used as a light source; for example, a color conversion method in which an organic light emitter that emits blue light is used, and the blue light is subjected to wavelength conversion into green light and red light is described in Japanese Patent Application Laid-open No. 3-152897, Japanese Patent Application

5 Laid-open No. 8-286033, and Japanese Patent Application Laid-open No. 9-208944. If fluorescent color-converting films containing such fluorescent colorants are patterned with high detail onto a transparent-supporting-substrate, then a full-color-luminescent-type display can be constructed even if low-energy light such as near ultraviolet light or visible light from an organic light emitter is used.

10 In an organic EL device that uses the color conversion method and has color filters, color-converting filters and an organic light emitter as constituent elements thereof, color filters produced using a pigment dispersion method are generally used in the case that heat resistance is required during the color display manufacturing process, and weather resistance and highly detailed pixels are required when using the display; fine dispersions of red, blue
15 and green pigments having a particle diameter of not more than 1 μm in a photosensitive resin solution are applied onto a glass substrate, and then pixels are formed in a desired pattern by photolithography (see Japanese Patent Publication No. 4-37987, Japanese Patent Publication No. 4-39041).

Improvements in the color purity, color saturation and optical transmittance of color
20 filters are being demanded, and hitherto, with an aim of improving the optical transmittance, a method has been adopted in which the content of the coloring pigment relative to the photosensitive resin in an image forming material is reduced, or the thickness of a pixel-forming film formed using the image forming material is reduced.

However, with such a method, the color saturation of the color filters themselves
25 drops, and hence the display as a whole becomes whitish, with the vividness of color required for display being sacrificed; if, on the other hand, the color saturation is given
MARKED SPECIFICATION 2 APPLN. OF Koji KAWAGUCHI et al.

priority and the content of the coloring pigment is increased, then the display as a whole becomes dark, and hence the amount of light from a backlight must be increased to secure sufficient brightness, and thus there is a problem of the energy consumption of the display being increased.

5 On the other hand, with an aim of improving the optical transmittance, a method is known in which the pigment particles are finely dispersed down to a particle diameter of less than half the wavelength of the color produced (see Kiyoshi Hashizume, Journal of the Japan Society of Color Material, December 1967, page 608), but with a blue pigment the wavelength of the color produced is shorter than with a red or green pigment, and hence in
10 this case yet finer dispersion is required, and thus the cost is increased and stabilization after the dispersion becomes a problem.

Furthermore, copper phthalocyanine blues having α , β and ϵ crystalline forms are widely used as blue pigments (see Shikizai Kogaku Handobukku ('Color Material Engineering Handbook'), edited by the Japan Society of Color Material, page 333), but in
15 the case of using α copper phthalocyanine blue alone as a blue pigment in color filters, the coloring power is low, and hence much pigment must be mixed in relative to the photosensitive resin to produce the desired color saturation, and there are outstanding issues with regard to thermal discoloration resistance after formation of the color filters and adhesion to a glass substrate, and moreover the amount of light transmitted at wavelengths
20 above 600 nm is high, and hence there is a problem of the color purity dropping.

On the other hand, in the case of using ϵ copper phthalocyanine blue alone as a blue pigment, the amount added relative to the photosensitive resin can be reduced due to the excellent coloring power of ϵ copper phthalocyanine blue, but if the amount of the pigment mixed in is increased until the desired color saturation is obtained, then the light-blocking
25 ability at 365 nm which is the wavelength for curing the photosensitive resin increases, and hence there is a problem that the photocuring sensitivity drops, causing film edging decrease
MARKED SPECIFICATION

of thickness and pattern flow upon developing.

Moreover, β copper phthalocyanine blue is a greenish blue, and hence in the case of using this alone as a blue pigment, there is a problem of the deviation from the desired NTSC hue being large.

5 Moreover, the use in color filters of a pigment obtained by mixing a copper phthalocyanine blue with a dioxazine violet is known (see Japanese Patent Publication No. 6-95211, Japanese Patent Application Laid-open No. 1-200353, Japanese Patent Publication No. 4-37987, etc.), and if a mixed color of one of the above three copper phthalocyanine blues and I.C. Pigment Violet 23, which is a dioxazine violet, is used, then the transmission
10 of light in a wavelength region of 500 to 550 nm can be suppressed, and hence the color purity can be improved; however, there is a problem that the transmission of light in the desired blue region of 420 to 500 nm is suppressed, and hence the brightness of a display drops. Furthermore, in a display, the optical transmissivity in the blue region is cut down by a polarizer to 70 to 80% compared with for other color regions, and hence there are calls for
15 an improvement in the amount of light transmitted by blue color filters.


It is an object of the ~~present~~ invention to provide a blue color filter having a high transmissivity in the blue region but a low transmissivity in the green region, and an organic electroluminescent device having a good blue color purity.

20 DISCLOSURE SUMMARY OF THE INVENTION

To attain the above object, in the ~~present~~ invention, a blue color filter is made to contain a first colorant represented by structural formula (1) and a binder resin, and also contain a second colorant that absorbs fluorescence from the first colorant and does not have
25 a fluorescence maximum in a visible wavelength region.

{Structural formula (1)}

MARKED SPECIFICATION

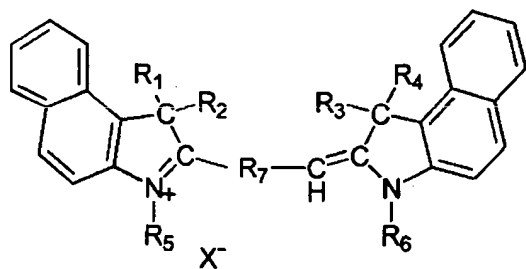


[In structural formula (1), each of R_1 to R_6 independently represents an optionally substituted hydrogen atom, alkyl group, aryl group, or heterocyclic group, and R_7 represents a chain
 5 unsaturated hydrocarbon group having 1 to 6 carbon atoms. X^- represents an anion selected from the group consisting of I^- , Br^- , Cl^- , F^- , ClO_3^- , BrO_3^- , IO_3^- , ClO_4^- , BF_4^- , PF_4^- , SbF_4^- , BrO_4^- , and organic anions.]

By using a first colorant represented by structural formula (1) as a blue dye in the blue color filter as described above, the optical transmissivity over 500 to 600 nm can be
 10 suppressed, and hence the purity of the blue color can be improved, and moreover a blue color filter that transmits a large amount of light can be obtained. Moreover, by including, together with the first colorant, a second colorant that absorbs fluorescence from the first colorant and does not have a fluorescence maximum in a visible wavelength region, i.e. not more than 750 nm, fluorescence in a wavelength region of 600 to 700 nm produced by the
 15 first colorant can be absorbed by the second colorant, and hence a drop in the purity of the blue color can be prevented.

Moreover, in the present invention, a blue color filter is made to contain a first colorant represented by structural formula (1) and a binder resin, and also contain a second colorant represented by structural formula (2).


20 [Structural formula (1)]

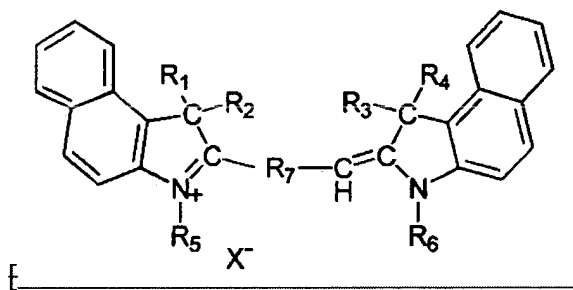

In structural formula (1), each of R₁ to R₆ independently represents an optionally substituted hydrogen atom, alkyl group, aryl group, or heterocyclic group, and R₇ represents a chain unsaturated hydrocarbon group having 1 to 6 carbon atoms. X⁻ represents an anion selected from the group consisting of I⁻, Br⁻, Cl⁻, F⁻, ClO₃⁻, BrO₃⁻, IO₃⁻, ClO₄⁻, BF₄⁻, PF₄⁻, SbF₄⁻, BrO₄⁻, and organic anions.}

{Structural formula (2)}

{Structural formula (2)}

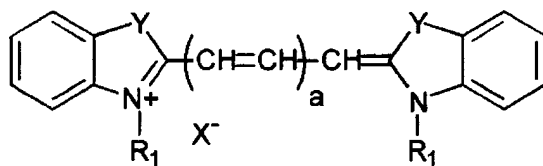

In structural formula (2), R₁ represents a hydrogen atom, an alkyl group, an aryl group, or a heterocyclic group. X⁻ represents an anion selected from the group consisting of I⁻, Br⁻, Cl⁻, F⁻, ClO₃⁻, BrO₃⁻, IO₃⁻, ClO₄⁻, BF₄⁻, PF₄⁻, SbF₄⁻, BrO₄⁻, and organic anions. Y represents an oxygen atom or a sulfur atom. a represents an integer from 1 to 6.}

Furthermore, the blue color filter of the present invention may be made to contain a quencher anion that quenches fluorescence from the first or second colorant.

Moreover, an organic electroluminescent device according to the present invention uses a blue color filter as above as at least some of the color filters thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic sectional view of an organic EL device having blue color filters of the ~~present~~ invention.

5

BEST MODE FOR CARRYING OUT THE INVENTIONDETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

As shown in FIG. 1, with an organic EL device 100 of the present embodiment, blue
 10 color filters 20, an organic protective layer 30, an inorganic oxide film 40, transparent
 anodes 50, a hole injection layer 51, a hole transport layer 52, a light-emitting layer 53, an
 electron injection layer 54, and cathodes 55 are formed in this order on a transparent
 supporting substrate 10, with the whole constituting the organic EL device 100.

Next, a description will be given of materials used in preparing a blue ~~image~~ pixel
 15 forming material for forming the blue color filters 20 in the ~~present~~ invention.

{

First colorant}

A blue color filter of the ~~present~~ invention contains a cyanine type colorant
 represented by structural formula (1) as a first colorant. One colorant represented by
 20 structural formula (1) may be used alone, or a plurality may be used in combination. A
 cyanine type colorant represented by structural formula (1) has high chemical and thermal
 stability itself, and hence the heat resistance of the blue color filter will be high even if a
 pigment dispersion method is not used. Furthermore, another blue pigment of a copper
 phthalocyanine type or the like may be used mixed with the first colorant.

25 With the ~~present~~ invention, when obtaining the blue image forming material, the
 mixing proportion of the cyanine type colorant represented by structural formula (1) relative
 MARKED SPECIFICATION

to a binder resin is preferably 0.1 to 40 parts by weight. As a result, transmission of light in a wavelength region of 500 to 550 nm can be suppressed, and hence the color purity can be improved. Moreover, the cyanine type colorant represented by structural formula (1) may be used after having been made into a pigment, in which case a publicly known method can be used as the method of manufacturing the blue pigment dispersion. For example, a blue pigment dispersion containing a copper phthalocyanine blue and a cyanine type colorant represented by structural formula (1) may be obtained by subjecting the copper phthalocyanine blue and the cyanine type colorant represented by structural formula (1), together with an organic solvent, a pigment derivative for dispersion stabilization (added if necessary) and a dispersant, to fine dispersion of the pigment and stabilization using a disperser such as a sand mill.

~~{Second colorant}~~

~~A colorant that absorbs fluorescence from the first colorant (600 to 700 nm) and does not have fluorescence in the visible wavelength region (750 nm or below) is added as a second colorant. The mixing proportion of the second colorant relative to the binder resin is preferably 0.1 to 40 parts by weight. Moreover, to enable functioning as a blue color filter, a colorant that does not absorb in the blue wavelength region is preferable. Specifically, a colorant for which the transmissivity at 450 nm is at least 60% when added to the filter can be used.~~

~~Examples include 1,1'-diethyl 4,4'-carbocyanine iodide (cryptocyanine), 1,1'-diethyl 2,2'-dicarbocyanine iodide (DDI), 3,3'-dimethyloxatricarbocyanine iodide (methyl-DOTCI), 1,1',3,3,3',3'-hexamethylindotricarbocyanine iodide (HITCI), IR125 (made by Lambda Physik), 1,1'-diethyl 4,4'-carbocyanine iodide (cryptocyanine), IR144 (made by Lambda Physik), 3,3'-diethyl 9,11-neopentylenethiatricarbocyanine iodide (DNTTICI), 1,1',3,3,3',3'-hexamethyl 4,4',5,5'-dibenzo-2,2'-indotricarbocyanine iodide (HDITCI), and 1,2'-diethyl 4,4'-dicarbocyanine iodide (DDCI-4).~~

Moreover, as the second colorant, a cyanine type colorant represented by structural formula (2) may be used, with specific examples including 3,3'-diethylthiatricarbocyanine iodide (DTTCI) and 3,3'-diethyl-4,4',5,5'-dibenzothiatricarbocyanine iodide (DDTTCI).

[Structural formula (2)]

5


{Second colorant

A colorant that absorbs fluorescence from the first colorant (600 to 700 nm) and does not have fluorescence maximum in the visible wavelength region (750 nm or below) is added as a second colorant. The mixing proportion of the second colorant relative to the binder resin is preferably 0.1 to 40 parts by weight. Moreover, to enable functioning as a blue color filter, a colorant that does not absorb in the blue wavelength region is preferable. Specifically, a colorant for which the transmissivity at 450 nm is at least 60% when added to the filter can be used.

Examples include 1,1'-diethyl-4,4'-carbocyanine iodide (cryptocyanine), 1,1'-diethyl-2,2'-dicarbocyanine iodide (DDI), 3,3'-dimethyloxatricarbocyanine iodide (methyl-DOTCI), 1,1',3,3,3',3'-hexamethylindotricarbocyanine iodide (HITCI), IR125 (made by Lambda Physik), IR144 (made by Lambda Physik), 3,3'-diethyl-9,11-neopentylenethiatricarbocyanine iodide (DNTTCI), 1,1',3,3,3',3'-hexamethyl-4,4',5,5'-dibenzo-2,2'-indotricarbocyanine iodide (HDITCI), and 1,2'-diethyl-4,4'-dicarbocyanine iodide (DDCI-4).

Moreover, as the second colorant, a cyanine type colorant represented by structural formula (2) may be used, with specific examples including 3,3'-diethylthiatricarbocyanine iodide (DTTCI) and 3,3'-diethyl-4,4',5,5'-dibenzothiatricarbocyanine iodide (DDTTCI).

25 Structural formula (2)

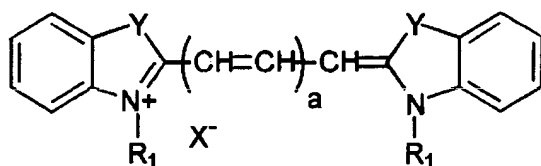

In structural formula (2), R₁ represents a hydrogen atom, an alkyl group, an aryl group, or a heterocyclic group. X⁻ represents an anion selected from the group consisting of I⁻, Br⁻, Cl⁻, F⁻, ClO₃⁻, BrO₃⁻, IO₃⁻, ClO₄⁻, BF₄⁻, PF₄⁻, SbF₄⁻, BrO₄⁻, and organic anions. Y represents
 5 an oxygen atom or a sulfur atom. a represents an integer from 1 to 6.

{Quencher}

The colorants used are cationic colorants, and hence, for example, an anionic singlet oxygen quencher can be used as a quencher. Specifically, transition metal chelates, bis-iminium salts and so on as disclosed in Japanese Patent Application Laid-open No.

10 59-55795, Japanese Patent Application Laid-open No. 60-234892 and so on can be used.

{

Binder}

The binder resin used in the blue color filter of the ~~present~~ invention is preferably transparent to visible light, and preferably has good adhesion to the substrate; a publicly

15 known thermoplastic resin, thermosetting resin, photocurable resin or the like can be used.

A photosensitive resin is particularly preferable, since then a fine pattern of filters can easily be formed.

{

Manufacture of blue color filters and organic EL device}

20 The blue color filter layers-20 are formed by applying a blue image forming material comprising materials as described above in a desired pattern on the transparent supporting substrate 10. There are no particular limitations on the application method, with it being possible to use an ordinary spin coating method, roll coating method, casting method,
 MARKED SPECIFICATION 10 APPLN. OF Koji KAWAGUCHI et al.

screen printing method, ink jet method or the like. There are also no particular limitations on the curing method, with it being possible to use heat curing (considering degradation of the fluorescent materials, curing at a temperature of not more than approximately 150°C is preferable), moisture curing, chemical curing, photocuring (considering degradation of the fluorescent materials, curing with visible light is preferable), a curing method combining the
5 above, or the like.

Before or after forming the blue pixels, red and/or green color filters may be formed as required using red and/or green pixel forming materials, whereby color filters of a plurality of colors can be formed. Furthermore, by forming an organic light emitter 500 on
10 the color filters with an organic protective layer 30 and an inorganic oxide film 40 therebetween, a multi-color organic EL device can be manufactured. Methods of forming the organic light emitter 500 include a method in which transparent anodes 50, a hole injection layer 51, a hole transport layer 52, a light-emitting layer 53, an electron injection layer 54 and cathodes 55 are successively formed on the color filters, and a method in which
15 an organic light emitter 500 formed on a separate substrate is stuck onto the inorganic oxide film 40. The organic EL device 100 manufactured in this way can be applied to either a passive driving type organic EL display or an active driving type organic EL display.

Examples are given below.

20 (Example 1)

{Formation of black mask}

Although not shown in FIG. 1, to eliminate the effects of reflected light at edges of the blue color filters 20 and the transparent electrodes 50 when evaluating the contrast, first a black mask was provided with an objective of making it such that the edges of the blue color
25 filters 20 could not be seen from the surface of the transparent supporting substrate 10.

A black mask coating liquid (CK8400L, made by Fujifilm Arch Co., Ltd.) was
MARKED SPECIFICATION 11 APPLN. OF Koji KAWAGUCHI et al.

applied over the whole surface of a glass transparent supporting substrate 10 using a spin coating method, drying was carried out by heating at 80°C, and then using a photolithography method, a black mask pattern of stripes with a pitch of 0.13 mm and gaps of 0.10 mm was obtained.

5 {


Formation of blue color filters}

Using a transparent photopolymerizable resin (259PAP5 made by Nippon Steel Chemical Co., Ltd.) as a binder, 2 parts by weight of a colorant represented by structural formula (3) as a blue dye was added to 100 parts by weight in terms of solids of the
 10 transparent photopolymerizable resin, and 1 part by weight of a second colorant represented by structural formula (4) (HDITCI made by Lambda Physik) was further added, thus obtaining a blue color filter coating liquid.


{

Structural formula (3)}

15

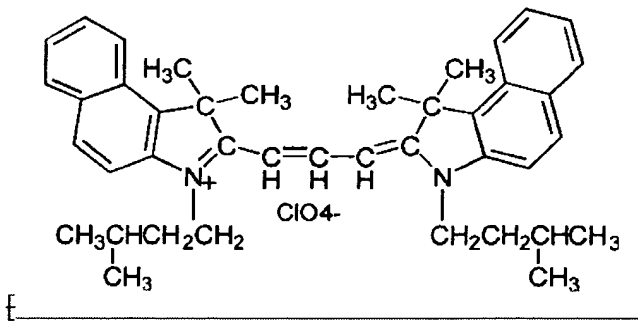

Structural formula (4)}

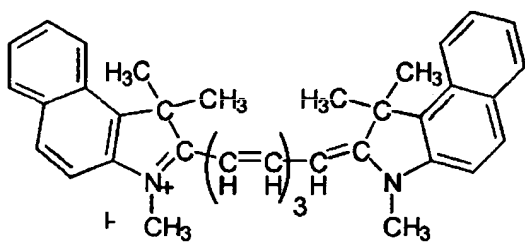

The blue color filter coating liquid was applied onto the transparent supporting substrate 10 using a spin coating method, drying was carried out by heating at 80°C, and then using a photolithography method, a blue color filter pattern of stripes with a pitch of 0.13 mm and gaps of 0.01 mm was formed.

{

Formation of organic EL device}

After the blue color filters 20 had been formed on one main surface of the glass transparent supporting substrate 10 using the above method, an organic protective layer 30 and an inorganic oxide layer 40 were deposited thereon in this order, and then an organic light emitter 500 was formed thereon, thus manufacturing an organic EL device 100. The organic light emitter layer 500 was constituted from six layers comprising transparent anodes 50, a hole injection layer 51, a hole transport layer 52, a light-emitting layer 53, an electron injection layer 54, and cathodes 55. The specific manufacturing procedure is described below.

A transparent photopolymerizable resin (259PAP5 made by Nippon Steel Chemical Co., Ltd.) was applied onto the transparent supporting substrate 10 on which the blue color filters 20 had been formed, and drying was carried out, thus forming an organic protective layer 30 of thickness 5 μm on the blue color filters 20, and then an inorganic oxide layer 40 of thickness 100 nm made of SiO_2 was formed thereon by sputtering. A layer made of ITO was then deposited over the whole of the inorganic oxide layer 40 by sputtering, and transparent anodes 50 were obtained by carrying out patterning as follows. That is, a resist

agent (OFRP-800 made by Tokyo Ohka Kogyo Co., Ltd.) was applied to a thickness of 100 nm onto the ITO film, and then transparent anodes 50 having a striped pattern with a line pitch of 0.13 mm and gaps of 0.01 mm were obtained using photolithography.

Next, the substrate was put into a resistive heating vapor deposition apparatus, and a
 5 hole injection layer 51, a hole transport layer 52, a light-emitting layer 53, an electron injection layer 54 and cathodes 55 were deposited in this order without releasing the vacuum. During the deposition, the pressure inside the vacuum chamber was reduced down to 1×10^{-4} Pa. Specifically, the hole injection layer 51 was made to be a copper phthalocyanine (CuPc) layer of thickness 100 nm, the hole transport layer 52 was made to be a
 10 4,4'-bis[N-(1-naphthyl)-N-phenylamino]biphenyl (α -NPD) layer of thickness 20 nm, the light-emitting layer 53 was made to be a 4,4'-bis(2,2'-diphenylvinyl)biphenyl (DPVBi) layer of thickness 30 nm, and the electron injection layer 54 was made to be a tris(8-hydroxy-2,2'-bipyridine) aluminum complex (Alq) layer of thickness 20 nm. Moreover, the cathodes were made to be Mg/Ag (weight ratio 1:10) of thickness 20 nm, and
 15 were formed in a striped pattern with a pitch of 0.33 mm and gaps of 0.05 mm perpendicular to the anode lines using masked vapor deposition.

After the deposition of the various layers described above had been completed, the organic EL device 100 was taken out from the vapor deposition apparatus, and was sealed using sealing glass and a UV adhesive under a nitrogen atmosphere without being allowed to
 20 come into direct contact with atmospheric air (not shown in the drawing). The organic EL device 100 manufactured emitted blue light having a peak at a wavelength of 470 nm.

(Example 2)


An organic EL device was manufactured as in Example 1, except that when forming
 25 the blue color filters, a colorant represented by structural formula (5) was used as a second colorant instead of the second colorant used in Example 1, with 1 part by weight being added

MARKED SPECIFICATION

per 100 parts by weight in terms of solids of the transparent photopolymerizable resin.

{

Structural formula (5)}

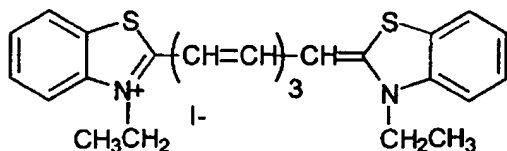


(Example 3)

A blue color filter coating liquid was prepared and an organic EL device was obtained as in Example 2, except that when forming the blue color filters, a nickel complex represented by structural formula (6) was added as a quencher in a proportion of 0.3 mol per 1 mol of the first colorant.

{

Structural formula (6)}



(Comparative Example 1)

A blue color filter coating liquid was prepared as in Example 1, except that a copper phthalocyanine blue was used as a pigment instead of the first colorant and the second colorant used in Example 1. The amount added of the pigment was made to be such that the optical transmissivity at a wavelength of 470 nm was the same as in Example 1 when the blue color filters were formed to the same thickness as in Example 1.

(Evaluation)

MARKED SPECIFICATION

15 APPLN. OF Koji KAWAGUCHI et al.

The following evaluation was carried out for each of the manufactured samples.

The evaluation results are shown in Table 1. Here, for the CIE chromaticity, each manufactured device was made to emit light and the chromaticity was evaluated. A color meter (MCPD-1000 made by Otsuka Electronics Co., Ltd.) was used in the measurements.

- 5 For the contrast, a comparison was carried out of the contrast for the case of irradiating light from a fluorescent lamp (1000 lx) onto the display surface of each device from an angle of 45°C. The values in the table are relative values taking the result for the comparative example to be 1.0; if the value is greater than 1.0, then the contrast is improved. For the transmissivity, the absorption spectrum was obtained using an absorptiometer (UV-2100PC
- 10 made by Shimadzu Corporation), and a comparison was made of the light transmissivities at wavelengths of 470 nm and 510 nm.

{Table 1}

| | Example 1 | Example 2 | Example 3 | Comparative Example 1 |
|-----------------------------|------------|------------|------------|-----------------------|
| (1) CIE chromaticity (x,y) | 0.12, 0.09 | 0.12, 0.10 | 0.13, 0.10 | 0.16, 0.18 |
| (2) Contrast | 1.4 | 1.4 | 1.6 | 1.0 |
| (3) Transmissivity (470 nm) | 85% | 85% | 85% | 85% |
| (510 nm) | 50% | 48% | 46% | 60% |

- As shown in Table 1, in the case of forming the films so as to have the same optical
- 15 transmissivity at 470 nm, the optical transmissivity at 510 nm is ~~higher~~ lower for the examples than for the comparative example. This means that the light-blocking ability in a wavelength region that would lower the purity of the blue color is higher for the color filters of the examples than for the color filters of the comparative example. Moreover, with the color filters of the comparative example in which a pigment was dispersed in a binder,
- 20 scattering is prone to occurring in the color filters and at interfaces. On the other hand, with the color filters of the examples, it is thought that the contrast exhibits a high value because

the colorants are completely dissolved in the binder and hence the transparency is high.

INDUSTRIAL APPLICABILITY

5 According to the ~~present~~ invention, there can be provided a blue color filter suitable for an organic EL display for which the purity of the blue color and the transmissivity are high and also the contrast is good, and an organic EL device using this blue color filter.